



DI EXCHANGE CARTRIDGE FILTERS

PUREPRO DI EXCHANGE CARTRIDGE FILTERS

Due to the requirements of high quality water in many industries, PurePro has developed the DI-3300-Series.

The PurePro DI-3300-Series provides high quality water in low volumes for specialized uses.

TOP QUALITY DEIONIZER RESINS


Manufactured according to the highest quality - double inspected. High quality resin of uniform size and stability provides more quality water.

ATTRACTIVE FUNCTION DESIGN

High quality water always available at a twist of the wrist. DI-3300 is designed for point of use application. Regeneration service can be provided by your local PurePro dealer.

CORROSION PROOF HOUSING

All plastic construction provides sturdy, corrosion proof and attractive housing.

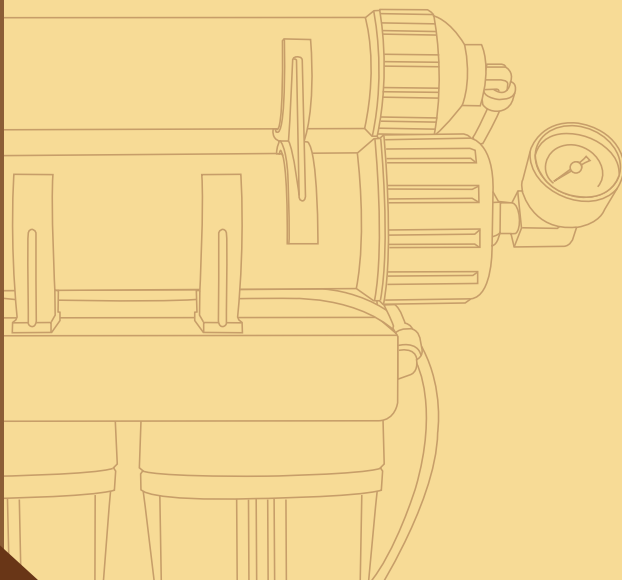

APPLICATIONS

- Laboratories
- Solution Preparation
- Glassware washing
- Analytical tests
- Dental offices
- Sterilizers
- Cosmetics
- Pharmaceutical uses
- Reagent make-up
- Evaporative equipment
- Still pre-treatment
- Humidification systems
- Breeding tanks

Specifications	In-Line DI-3300	
	DI	Softening
Capacity (Grains)	270	450
Flow Rate (Gal/min)	0.13	0.13
Max. Pressure Inlet (Psi)	100	100
Temperature Range (°F)	45 to 100	45 to 100
Diameter (Inch)	5 1/3	5 1/3
Height (Inch)	13	13
Weight (lbs)	8	8
Price	-	
QTY.	25 pcs / box	

Softening or Deionizing

© PUREPRO USA CORP., ILLINOIS, U.S.A.