Memo

Type of product			
Date of purchase			
Name		Tel	
Address		·	

ERS-106 Quick-Change RO Systems





REVERSE OSMOSIS SYSTEM

ERS-106RP **USER'S MANUAL**



- What is reverse osmosis
- Components & Selected filters
- Cartridge filters
- The parts of ERS-106RP
- Tubing connection diagram
- Installation diagram
- Change filters
- Change membrane
- Operation regulation
- The functions of Infra-Red filter
- FAQ 13
- Maintenance checking list
- 15 Memo

Thank you very much for selecting Pure-Pro Water Corp.

In order to bring the best use of your system, please read the user's manual carefully before installation and follow the regulations.



ERS-106RP Quick-change RO system

PurePro® Quick-Change RO system uses the most advanced water treatment technology: "Reverse Osmosis". Reverse Osmosis (RO) is recognized as one of the best available technologies for producing best quality drinking water. It's also the same method used by many bottled water companies to make safe and great tasting water. No other home water treatment system can offer you as much protection and reliability.

Quick-change cartridge filters

** Quick-Change RO systems are so easy to service!!

The newly designed quick-change RO system is user friendly with design simplicity in mind. It requires no tools for filter changes. Use twist and quick-change cartridge design makes filter changes fast, clean and easy. This space saving allows maximum use of your under counter space.

Specifications

• Production: 50 GPD/ 189 LPD

• With a transformer, available in 110 Volt, 220 Voltor 240 Volt (50/60 Hz)

• Water storage tank: 3.2gallons / 12.2 liters

• Operation pressure: 5 - 80 psi

• Dimensions: (cm) 29(L) x 42.5(H) x 21(W) - system

(cm) 28 (L) x 28 (W) x 35 (H) - tank

• Weight: 8 kg - system 4 kg -tank

ERS-106 Quick-Change RO Systems



Maintenance checking list

Filters	1st stage	2nd stage	3rd stage	4th stage	5th stage	6th stage

PURE-PRO 🔂 REVERSE OSMOSIS SYSTEM



FAQ

Q: What is the guarantee on the PurePro system?

The PurePro system (excluding filters) is guaranteed for 1 year for material and workmanship. All defective parts will be replaced free within the first year under natural breakdown. The membrane has one year pro-rated guarantee.

Q: What factors affect the quantity and the quality of the water production?

There are four major variables to consider:

- 1. Pressure-The greater the water pressure, the better water quantity and quality it produced. Water pressure of 60 PSI is ideal.
- 2.**Temperature**-76°F is the ideal water temperature for R.O. 40°F water will cause the production of R.O. water to fall to half of that at 76°F. The maximum water temperature recommended is 85°F.
- 3.Total Dissolved Solids (TDS)-The higher the amount of dissolved contaminants in the water, the lower the quantity of water produced. A high level of TOTAL DISSOLVED SOLIDS can be overcome with additional water pressure.
- 4. Membrane-Different membranes have different characteristics. Some produce more water than others; some have better contaminant rejection capabilities; some have greater resistance to chemical abrasion for longer life. PurePro system includes TW30-1812-50 The Thin Film Composite (TFC) membranes combine the best of these characteristics and are considered the finest membrane in the world.

Q: Can the PurePro system be connected to an extra faucet?

It only takes a 1/4" tee and tubing to run the water to a refrigerator or a extra faucet. Some families run PurePro system to all of their bathrooms.

Q: What does the PurePro series drinking water taste like?


The taste of the PurePro water depends on the amount of contaminants in the tap water originally. If 95% of dissolved minerals and chemicals are removed. the R.O. water may taste like distilled water (no minerals), bottled water (low mineral), or natural spring water (moderate mineral content).

ERS-106 Quick-Change RO Systems



What is reverse osmosis

Reverse osmosis was originally designed to make sea water drinkable for the navy. It is ideal for anyone on a low sodium diet. An R.O. membrane has a pore size much smaller than bacteria virus, or the cryptosporidium parasite. When functioning properly it will remove all microorganisms from tap water and produce sterile water. Reverse osmosis is the reversal of the natural flow of osmosis. In a water purification system, the goal is not to dilute the salt solution, but to separate the pure water from the salt and other contaminants. When the natural osmotic flow is reversed, water from the salt solution is forced to pass through the membrane in the opposite direction by application of pressure-thus the term REVERSE OSMOSIS. Through this process, we are able to produce pure water by screening out the salts and other contaminants.






Components & Selected filters

Components Standard faucet Water storage tank Tubing Water supply connector Deliver-valve Tankball shut-off valve Drain saddle

Selected filters

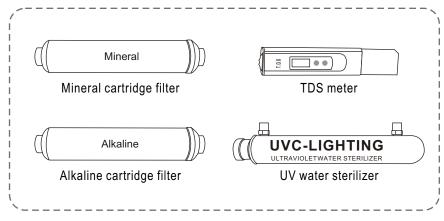

ERS-106 Quick-Change RO Systems



The functions of Infra-Red filter

Far Infrared rays (FIR) are part of the sunlight spectrum, which is invisible to the naked eye. The wavelength of the far infrared rays ranges from 4 microns to 1000 microns. The recent studies in biotechnology field revealed that the far-infrared rays played an important role for formation and growth of all living organisms. For this reason, these specific far-infrared rays are called "biogenetic rays". Water and proteins are the integral parts of all living organisms on Earth. Water molecules are always oscillating. Water makes up 70% of mass of the human body. FIR is able to activate, revitalize, reactivate, develop and strengthen various organs in our bodies when it is absorbed.

In the various organs of human body, the circulatory system plays an important role, especially in micro-circulatory system. When there are problems with micro-circulatory system, various ailments will occur. FIR vibrating at a frequency similar to that of human body is able to penetrate the body activates cells and reactivates as well as strengthens the micro-circulatory systems. It regulates the blood flow and blood in blood vessels, which have been blocked due to blood clots and at the same time reactivate the vital energy in the body.

REVERSE OSMOSIS SYSTEM

PURE-PRO

Elevation of the immunity of our bodies against diseases is another benefit of FIR waves. This is part of the effects of the improvement in micro-circulatory system and metabolism of the body. It helps slow down the aging process, increase resistance against diseases and increases longevity.

The effect of Far-infra-red rays to our human body is as follows:

- · Activating water molecules in our body
- Improving oxygen level and nervous in our body
- Warming and eliminating fats, chemicals, toxins, and otherwaster from our blood and thus smoothening the flow of blood
- Reducing the acidiclevel in our body
- · Preventing bacteria from growing
- · Relieving pain
- · Softening of hardwater
- · Eliminating bad odorin water
- Purifying air
- Strengthening and improving health
- · Speeding up repair of body cells
- · Balancing acid level in human bodies
- · Normalizing blood cholesterol
- · Preventing mould
- Enhancing and maintain freshness
- Helping plants grow better



Operation regulation

- A. With everything connected, turn on the water check for leaks.
- B.Make sure the storage tank shut-off valve is "OFF". Open the sink top faucet.
- C. Within a few minutes (up to 15) the water will start to run from the faucet slowly.
- D.Let the water run for at least 30 minutes. This flushes the carbon filters on first time use.
- E.After initial flushing, open the shut-off valve on the tank and close the sink top faucet.
- F. Tank will now full of water (usually 2 to 3 hours) after the tank has filled. Open the sink top faucet and drain all water until the storage tank is empty and there is only a small flow from the sink top faucet.*** DO NOTUSE FIRST TANK OF WATER.***
- G.Close the sinktop faucet. The system is now ready for use.
- H.Change filters regularly every 6 to 12 months and have the membrane checked annually.

Caution

- 1.Do not use hot water (over 45°C)!
- 2.Do not freeze the machine!
- 3. Switch off electricity and water source if away for more than 5 days, and drain outpure water.

ERS-106 Quick-Change RO Systems





Cartridge filters

Cartridge Filters	Filter Description	Service Life
Stage 1 5 Micron Sediment Filter	S300ST With only five micron rating. It is effective in removing dirt, rustand sand particles.	6 Months
Stage 2 GAC Carbon Filter	S300ND It takes out 99% of the chlorine and organic chemicals. It provides enhanced reduction of taste, odor, and color.	6 Months
Stage3 CTO Carbon Filter	S300RD It takes out 99% of the chlorine and organic chemicals. It provides enhanced reduction of taste, odor, and color.	6 Months
Stage 4 TFC Membrane	A thin film composite (TFC) high quality membrane that processes 50 gallons per day. It remove the following hard water contaminants that may be present in your water: lead, cooper, barium, chromium, mercury, sodium, cadmium, fluoride, nitrite, nitrate, and selenium.	2 Years
Stage 5 Post Carbon Filter	NSF approved. This post carbon filter is designed to improve taste. It removes any residual impurities and odors from the tank and provides a finer conditioning of pure water.	1 Year
Stage 6 Infra-Red Filter	in our body and improve evygen level in our body	

PURE-PRO REVERSE OSMOSIS SYSTEM



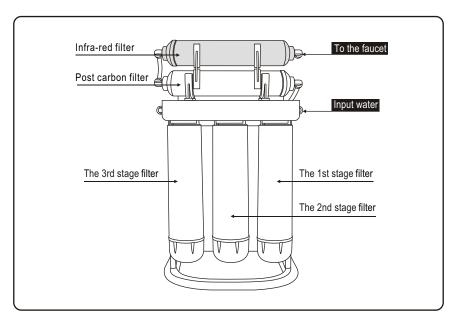


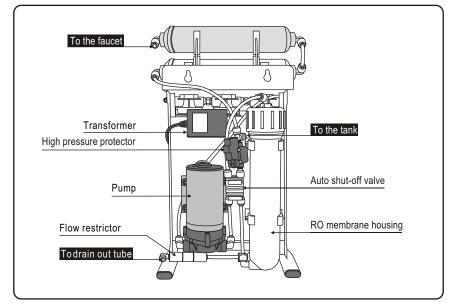



ERS-106 Quick-Change RO Systems




Operation regulation










PURE-PRO 6 REVERSE OSMOSIS SYSTEM




Change membrane




SYSTEM


REVERSE OSMOSIS


PURE-PRO















ERS-106 Quick-Change RO Systems



Tubing connection diagram

CONNECTING THE COLORTUBING:


- A. Connect the WHITE tubing to the water supply connector.
- B. Connect the BLUE tubing to the sink top faucet.
- C. Connect the BLACK tubing to the drain saddle.
- D. Connect the RED tubing to the storage tank.

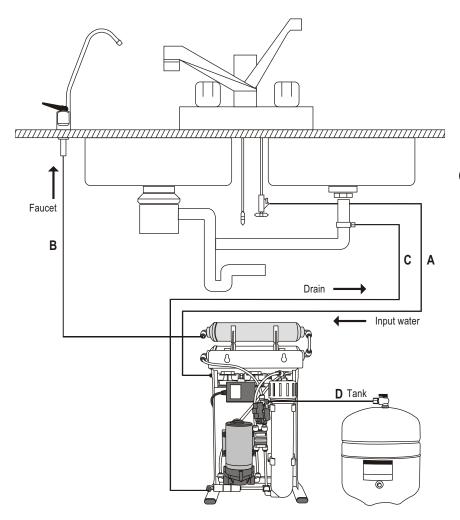





Input water: Water supply connector To RO system Towater source pipe Deliver valve







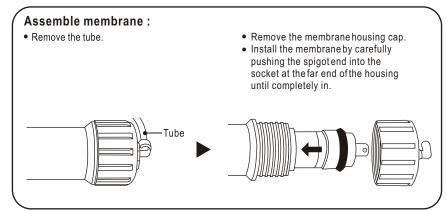

ERS-106 Quick-Change RO Systems



Change filters

